



Introducing BluKey PayStation™ Mini



BluKey PayStation mini



Installation Guide

BluKey PayStation mini


Welcome to your new BluKey PayStation mini. PayStation, our connected room solution, enables your customers to conveniently use any PayRange enabled machine nearby, without the need for a phone or PayRange account. The BluKey PayStation mini streamlines the entire payment process, allowing users to complete their transactions directly on the PayStation.

Use this guide to install your new BluKey PayStation mini. We designed setup to be completed within 30 minutes with intuitive, simple packaging and easy-to-follow instructions.

Before Getting Started

- ✓ Make certain your machines are equipped with a PayRange BluKey.
- ✓ Make sure there is a stable and adequate internet connection in the room you will be installing the PayStation.
- ✓ Ensure a 110V outlet is available to power the PayStation.

PayRange Laundry System – Products Required

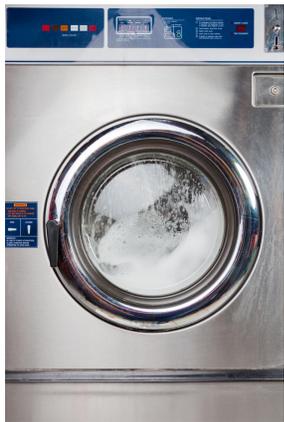

Laundry Machine



BluKey



BluKey Connect



BluKey PayStation mini

What's Required to Get Started

1

Smartphone with PayRange App



2

PayRange Operator Account




3

Tools to assist with installation



4

PayRange products (PayStation, BluKey, BluKey Connect)

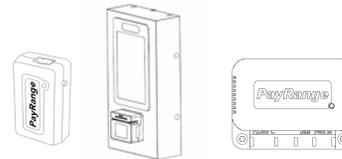

5

PayRange enabled machines



6

Stable internet connection & 110V power outlet



Tools Required



Phillips screwdriver



Recommended cordless drill

What's Included



BluKey PayStation XL



BluKey Connect



**BluKey Connect
Micro-USB Power
Adapter**



**Mounting Screws
Screw Covers**

Getting Started

IMPORTANT: PayRange BluKey PayStation mini requires data connection. Prior to installation, verify location has adequate cellular reception. If a mobile web browser can load a website relatively quickly, data connection should be adequate.

Prepare PayStation

- 1 Carefully remove the BluKey Connect and BluKey PayStation from its packaging.
- 2 Prepare the PayStation for installation by first removing the back panel. There are two screws located on the bottom of the PayStation mini (Fig. 1).
- 3 Remove the two screws using a T20 screwdriver and bit, then carefully remove the top back panel.
- 4 If using an internet or cellular connection, connect the ethernet cable from the ethernet router or cellular modem to the ethernet port located on the back of the PayStation (Fig 2).



Best practice is to **install** the BluKey PayStation next to the laundry room **change machine**.

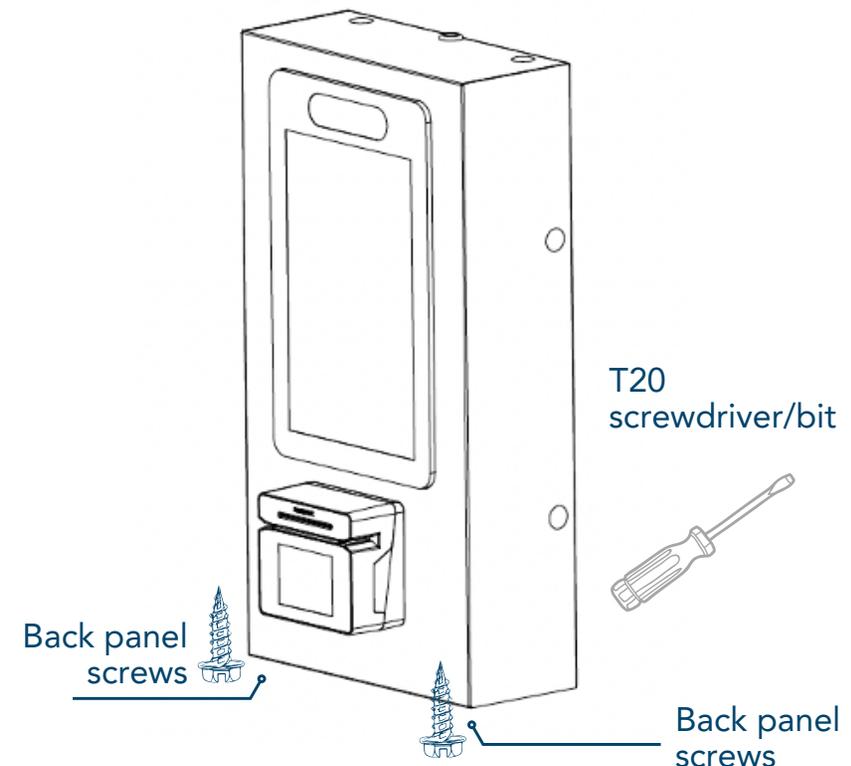


FIG. 1

Getting Started

- 5 Place the PayStation back mounting panel on the wall (ADA Compliant) and mount it securely using the included mounting hardware (Fig. 3).
- 6 Attach the PayStation to the back mounting panel that was mounted to wall in the previous step (Fig. 4).
- 7 Screw back the two T20 screws to the bottom side of the PayStation (Fig. 5). Use the screw covers to cover the two screws (Fig. 5).
- 8 Ensure the PayStation is securely mounted to the wall and all screws have been screwed back onto the PayStation.
- 9 Plug the PayStation power cord into a 110v power supply. Ensure the PayStation powers ON and the home screen is displayed.
- 10 Follow the on-screen instructions for the remaining installation and set-up.

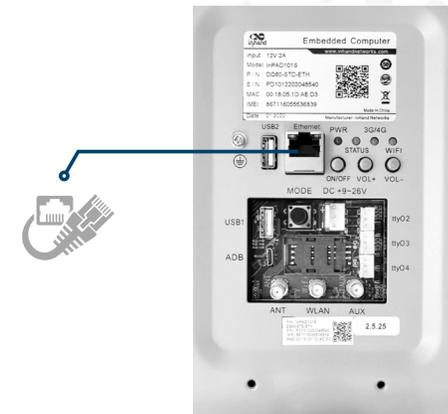


FIG. 2

(BACK OF PAYSTATION)

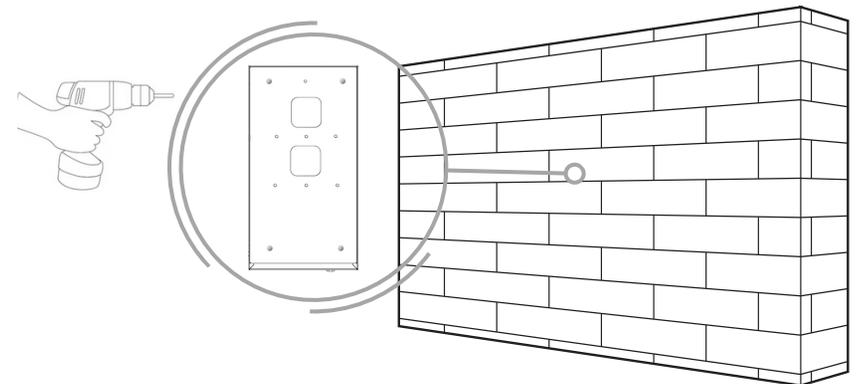


FIG. 3

Getting Started


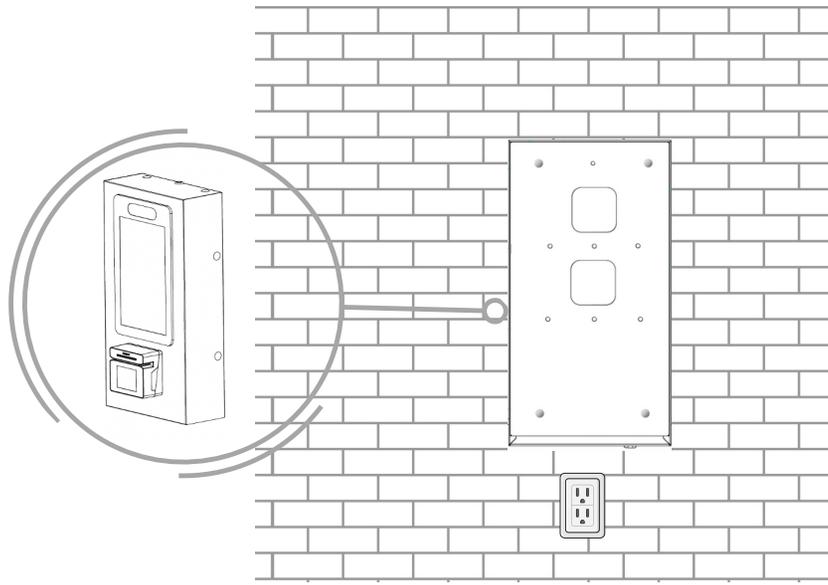


FIG. 4

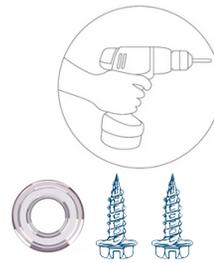

x 2 (Screws)
x 2 (Screw covers)

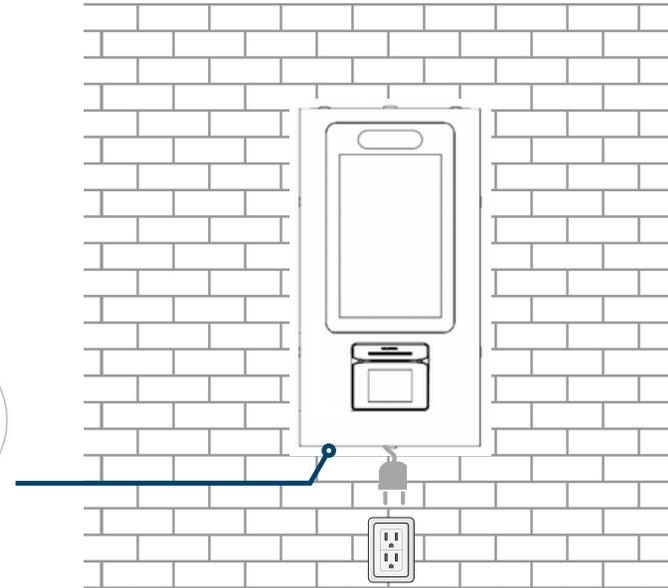


FIG. 5

Get the most from PayRange

Resources, education, and support at your fingertips 24/7

PayRange Central

PRODUCT RESOURCES

Find the latest videos for common support scenarios, account setup, installation, and setting up promotions.

Visit vimeo.com/payrange

PayRange Support

SUPPORT

Visit our operator support page to find answers to frequently asked questions. Learn how to set up promotions, register devices and more.

Visit support.payrange.com

Technical Support

 ask@payrange.com

Sales & Marketing

SHOP PAYRANGE

 sales@payrange.com



Need Support?

For assistance with installing and operating your PayRange devices, please contact our support team.